



# Heyco® Snap Bushings

Mounting Diameter: 0.250"-0.750"

- Converts raw-edged holes to smooth, neat, insulated holes.
- Locking fingers “snap” into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in 58 sizes for use in 1/4" (6,4mm) to 6" (152,4mm) diameter holes.
- We stock the following brass-colored parts for lamp and lighting applications:  
 Part No. 2012, SB 312-3 Brass  
 Part No. 2033, SB 375-4 Brass  
 Part No. 2041, SB 437-4 Brass




**Consult Heyco for Colors Other Than Black or White**

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Maximum Thickness	Mounting Hole Diameter		Black	White	A Inside Diameter		B Head Diameter		C Overall Height			
	in.	mm.			in.		mm.	in.	mm.	in.	mm.	in.
.040	1,0	.250	6,4	2003*	2004*	SB 250-040	.125	3,0	.312	7,9	.312	7,9
.062	1,6	.250	6,4	2000*	2001*	SB 250-2	.125	3,0	.312	7,9	.312	7,9
.062	1,6	.312	7,9	2010*	2011*	SB 312-3	.187	4,8	.375	9,5	.312	7,9
.125	3,2	.375	9,5	2020	2021	SB 375-3	.187	4,8	.468	11,9	.406	10,3
.125	3,2	.375	9,5	2030	2031	SB 375-4	.250	6,4	.468	11,9	.406	10,3
.172	4,4	.375	9,5	2017*	2018*	SB 375-281	.281	7,1	.468	11,9	.406	10,3
.125	3,2	.437	11,1	2038	2039	SB 437-4	.270	6,8	.531	13,5	.406	10,3
.125	3,2	.437	11,1	2043	2044	SB 437-5	.312	7,9	.531	13,5	.406	10,3
.125	3,2	.437	11,1	2042	2037	SB437-243	.243 <sup>+0.015</sup> <sub>-.000</sub>	6,2	.531	13,5	.406	10,3
.125	3,2	.500	12,7	2058	2059	SB 500-4	.250	6,4	.578	14,7	.406	10,3
.125	3,2	.500	12,7	2049	2050	SB 500-5	.312	7,9	.578	14,7	.406	10,3
.125	3,2	.500	12,7	2053	2054	SB 500-6	.391	9,9	.578	14,7	.406	10,3
.125	3,2	.562	14,3	2060	2061	SB 562-5	.312	7,9	.656	16,7	.406	10,3
.125	3,2	.562	14,3	2063	2064	SB 562-6	.391	9,9	.656	16,7	.406	10,3
.125	3,2	.562	14,3	2066	2067	SB 562-7	.437	11,1	.656	16,7	.406	10,3
.125	3,2	.625	15,9	2075	2078	SB 625-4	.250	6,4	.718	18,2	.406	10,3
.125	3,2	.625	15,9	2070	2071	SB 625-7	.437	11,1	.718	18,2	.406	10,3
.125	3,2	.625	15,9	2073	2074	SB 625-8	.500	12,7	.718	18,2	.406	10,3
.280	7,1	.625	15,9	2830*	2831*	SB 625-500	.500 <sup>+0.015</sup> <sub>-.000</sub>	12,7	.703	17,9	.531	13,5
.125	3,2	.687	17,4	2083	2084	SB 687-8	.500	12,7	.781	19,8	.406	10,3
.125	3,2	.687	17,4	2086	2087	SB 687-9	.562	14,3	.781	19,8	.406	10,3
.125	3,2	.750	19,1	2090	2091	SB 750-6	.391	9,9	.843	21,4	.406	10,3
.125	3,2	.750	19,1	2092	2099	SB 750-8	.500	12,7	.843	21,4	.406	10,3
.125	3,2	.750	19,1	2093	2094	SB 750-9	.562	14,3	.843	21,4	.406	10,3
.125	3,2	.750	19,1	2096	2097	SB 750-10	.609	15,5	.843	21,4	.406	10,3
.250	6,4	.750	19,1	2840*	2841*	SB 750-625	.625 <sup>+0.015</sup> <sub>-.000</sub>	15,9	.828	21,0	.531	13,5

Standard Colors: Black or White. Consult factory for color matching, prices, and minimum order quantities.

\*Depicts single panel design.

Locking fingers in fractional increment up to the maximum panel thickness.

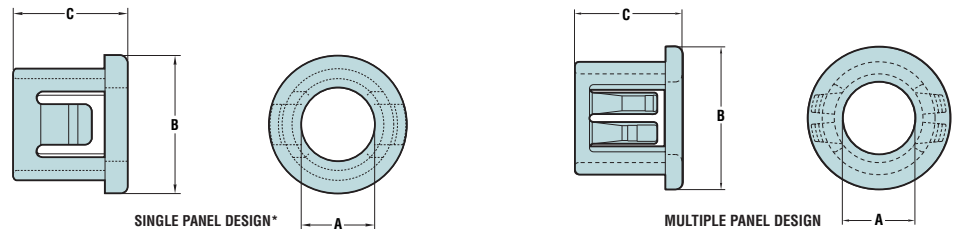

*Quick Specs*

**Material** 6/6 “Nylon”  
**Certifications** Recognized under the Component Program of Underwriters’ Laboratories, File #E-15331  
 Certified by Canadian Standards Association, File #LR-8919  
**Flammability Rating** 94V-2  
**Material Temperature Index** 125°C—Maximum temperature on part not to exceed 105°C